


RECCOMENDED TO BE USED WITH LED STRIP FIXTURE  
LED FLEXIBLE TAPE  
CAN BE SCALED TO FIT T5 OR T8 FLUORESCENT, CONSULT FACTORY

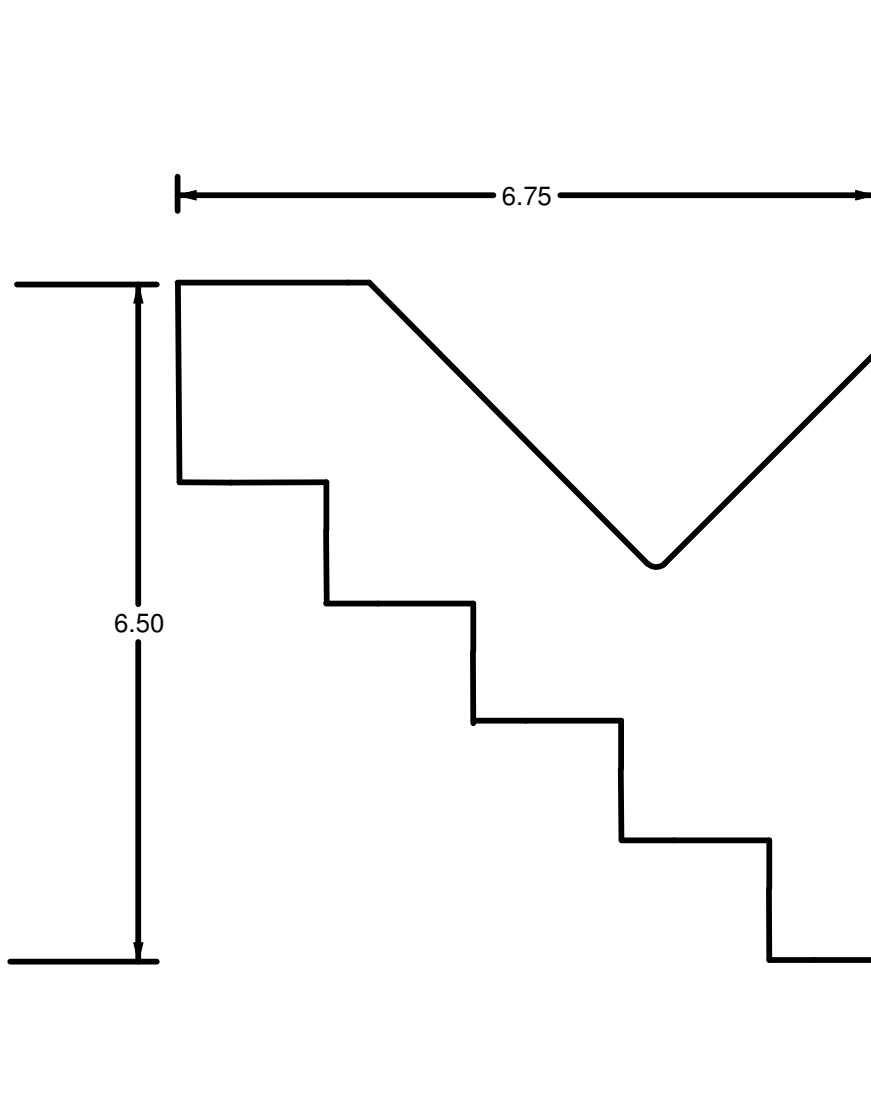

FIRE RATED - ASTME-84

**MATERIAL:** CONSTRUCTED FROM AN EXTRUDED POLYSTYRENE BASE, A FLEXIBLE CEMENTITIOUS BASECOAT AND A REVOLUTIONARY, SMOOTH POLYMER MODIFIED PLASTER FINISH.

**NOTES:** THE LOOK AND FEEL OF A SEAMLESS PLASTER COVE FABRICATED IN 8' LENGTHS, CUT AND MITRED TO FIT, THEN PRIMED AND PAINTED IN THE FIELD.

LUMAROC MOUNTS TO THE WALL USING SHEET ROCK SCREWS AND A GYPSUM BASED DRYWALL COMPOUND TO THE BACK AND TO THE JOINTS.

LIGHT WEIGHT DESIGN.  
LUMAROC IS A STABLE LUMINAIRE FITTING THAT WILL NOT CRACK SHRINK OR SWELL.

## LUMAROC MODERN STEP LRMS-6750-6500

SCALE:  
NONE

DATE:  
09/10/2011

DRAWN BY:  
MJW

SHEET:  
1 of 1

## CLASSIC COVES

PO BOX 266 GARWOOD, NJ 07027

Phone 908-344-1776

Fax: 908-345-6176

[www.classiccoves.com](http://www.classiccoves.com)