


Suitable for T5 Staggered Strips

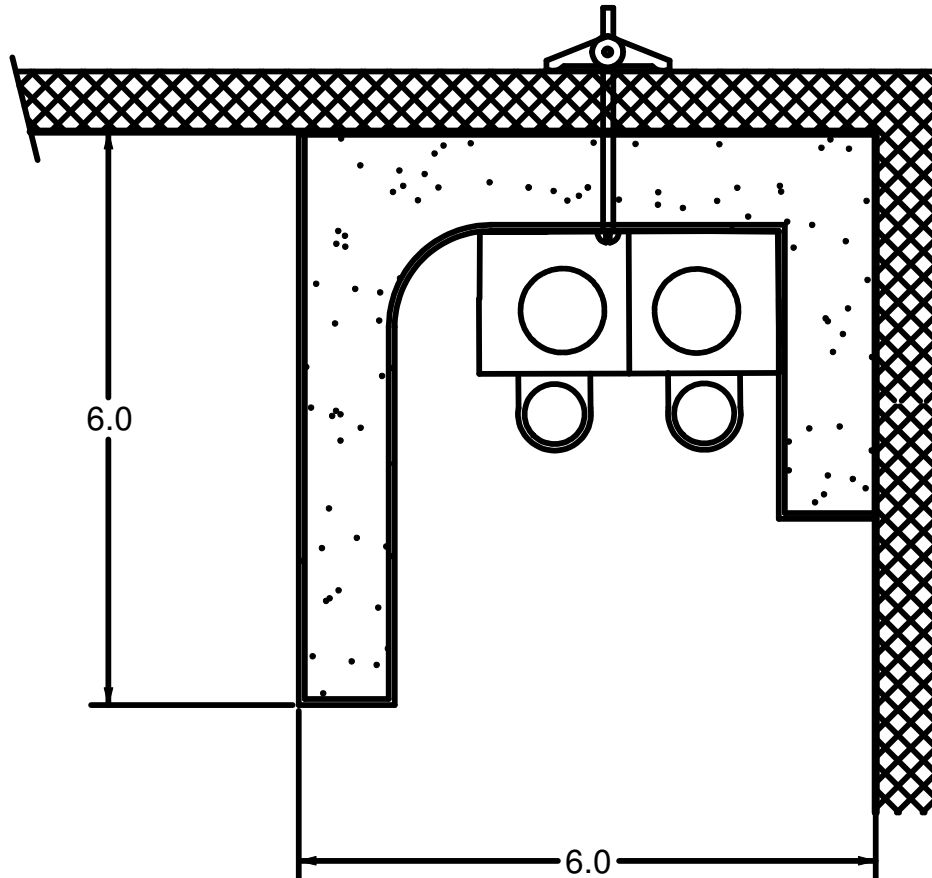

FIRE RATED - ASTME-84

MATERIAL: CONSTRUCTED FROM AN EXTRUDED POLYSTYRENE BASE, A FLEXIBLE CEMENTITIOUS BASECOAT AND A REVOLUTIONARY, SMOOTH POLYMER MODIFIED PLASTER FINISH.

NOTES: THE LOOK AND FEEL OF A SEAMLESS PLASTER COVE. FABRICATED IN 8' LENGTHS, CUT AND MITRED TO FIT, THEN PRIMED AND PAINTED IN THE FIELD.

LUMAROC MOUNTS TO THE WALL USING SHEET ROCK SCREWS AND A GYPSUM BASED DRYWALL COMPOUND TO THE BACK AND TO THE JOINTS.

LIGHTING FIXTURES SHOULD BE MOUNTED TO THE WALL INDEPENDENT OF THE COVE FITTING.

LIGHT WEIGHT DESIGN.

LUMAROC IS A STABLE LUMINAIRE FITTING THAT WILL NOT CRACK SHRINK OR SWELL.

**LUMAROC WALL WASH
CAT # LRWW-6000-6000**

SCALE:
NONE

DATE:
3/2/2011

DRAWN BY:
MJW

SHEET:
1 of 1

CLASSIC COVES

PO BOX 266 GARWOOD, NJ 07027
PHONE: 908-344-1776 Fax: 908-345-6176
www.classiccoves.com